


F529-7PFB Finish(B) ☐

F529-7PFC Finish(C) ☐

F529-7PFS Finish(S) ☐

F529-7PFY Finish(Y) ☐

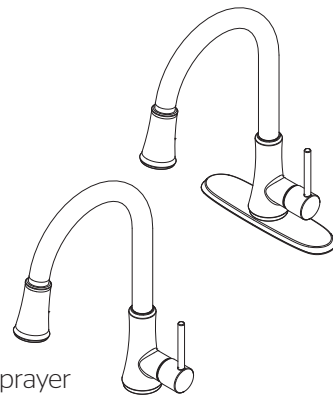

Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- Forward Handle Operation
- Pfaster Connect™
- Quick Install Tool Included
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

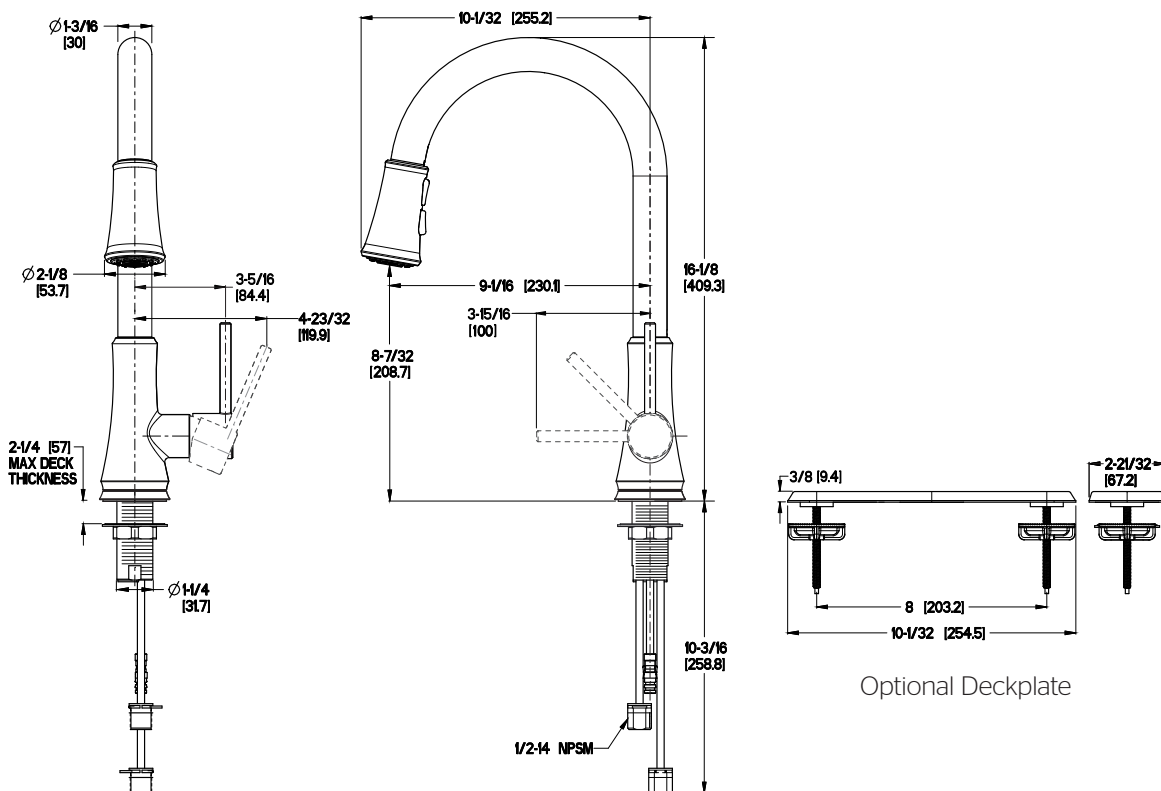

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings